
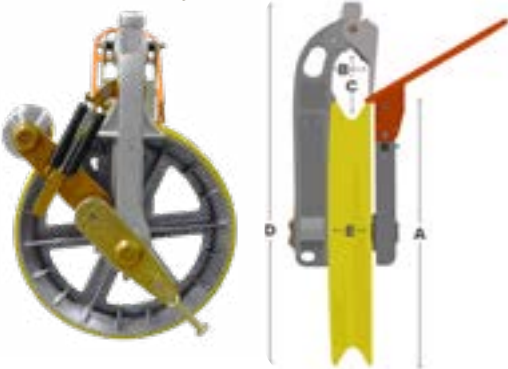


DDIN®

GROUNDING HELICOPTER BLOCKS

DDIN Grounding Helicopter Blocks combine the same quality features of both the standard grounded block and standard helicopter block. The unique "Snap Lock" fold away helicopter arm eliminates the need for removing pins to deploy or retract the fly arm, making the DDIN Grounding Helicopter Block ideal for stringing multiple sizes of single overhead conductors where the pilot line will be flown in. These blocks are assembled with a groundbreaking new Gold Standard Grounding Arm mounted directly to the axle.

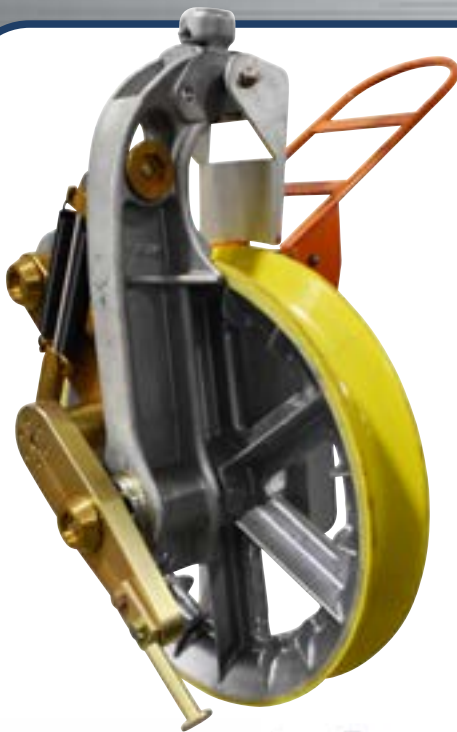

GOLD STANDARD GROUNDING ARM FEATURES

- GOLD STANDARD, patent pending
- Unique industry-leading design
- Heavy-duty, corrosion resistant
- Constructed of 100% precision machined aircraft-grade aluminum
- Iridate coating to improve conductivity
- Limited arm travel to prevent over-extension
- Dual-axle sealed bearings
- Dual-spring design
- 100% zinc dichromate plated high-strength hardware
- Tamper resistant

BLOCK FEATURES

- Smooth and consistent operation
- GOLD Standard grounding arm mounted directly to the axle (see features)
- 4 1/2" x 3/4" Ground stud accepts virtually any ground clamp
- Dual heavy-duty springs keeps the roller in constant contact with the conductor
- "Snap Lock" fold away helicopter arm
- Spring-loaded side gate
- Shielded bearings lubricated with synthetic aviation grease
- Innovative Contact Roller
- Innovative Anchor Point

PART #	A	B	C	D	E	WLL	WEIGHT
STANDARD							
DNSB22UH-G	22"	3-3/8"	7-1/2"	32-1/2"	2"	12,000 lbs.	82 lbs.
DNSB28UH-G	28"	3-1/2"	7-1/2"	30"	2-1/8"	12,000 lbs.	94 lbs.
WIDE							
DNSBW22UH-G	22"	3-3/4"	7-1/2"	32-1/2"	3-1/4"	12,000 lbs.	92 lbs.
DNSBW28UH-G	28"	4"	7-1/2"	39"	3-1/4"	12,000 lbs.	102 lbs.

TALLMAN
EQUIPMENT CO., INC.
EMPLOYEE OWNED

www.tallmanequipment.com

Call Toll Free: 877-860-5666 · International: 630-860-5666

