

HELICOPTER BLOCKS

DDIN Helicopter Blocks are ideal for stringing multiple sizes of single overhead conductors where the pilot line will be flown in. A unique feature of these blocks is the exclusive "Snap Lock" fold away helicopter arm, which eliminates the need for removing pins to deploy or retract the fly arm.



WIDE HELICOPTER BLOCKS

- Wider version of the Standard Helicopter Stringing Block
- "V-Groove" urethane lined wide-throat sheave
- Designed to improve the installation of T2® and VR2® conductors
- · Constructed of aluminum alloy, lightweight and durable
- Anti-friction bearings packed with synthetic aviation grease

	PART #	A	В	C	D	E	WLL	WEIGHT
	DNSBW22UH	22"	3-3/4"	7-1/2"	32-1/2"	3-1/4"	12,000 lbs.	71.5 lbs.
	DNSBW28UH	28"	4"	7-1/2"	39"	3-1/4"	12,000 lbs.	78 lbs.
	DNSBW36UH	36"	5-3/8"	10-1/2"	49-1/4"	4"	12,000 lbs.	158 lbs.
	DNSBW42UH	42"	5-3/8"	10-3/4"	55"	4"	12,000 lbs.	192 lbs.

STANDARD HELICOPTER BLOCKS

- Smooth and consistent operation
- "Snap Lock" fold away helicopter arm
- Spring-loaded side gate
- Constructed of aluminum alloy, lightweight and durable
- Anti-Friction Bearings packed with synthetic aviation grease

PART #	A	В	C	D	E	WLL	WEIGHT
DNSB22UH	22"	3-3/8"	7-1/2"	32-1/2"	2"	12,000 lbs.	62.5 lbs.
DNSB28UH	28"	3-1/2"	7-1/2"	39"	2-3/8"	12,000 lbs.	73.5 lbs.

ALLMAN EQUIPMENT CO., INC. EMPLOYEE OWNED www.tallmanequipment.com

Call Toll Free: 877-860-5666 · International: 630-860-5666











UNIVERSAL HELICOPTER BLOCKS


Available with the following Sheaves



Urethane Lined (LS)



Ductile Iron (DI)

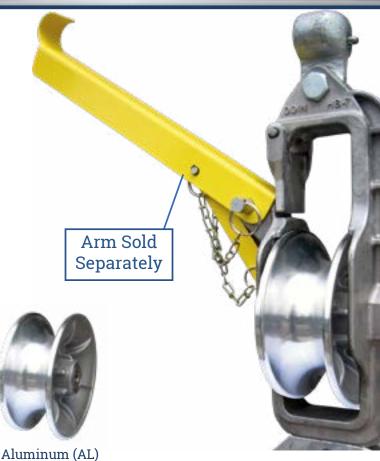

- Gate Style: Heavy-duty spring-loaded gate.
- · High-strength aluminum alloy frame
- Arm is retained with locking detent pins
- Arm Length: 16" (Helicopter arm is sold separately)

PART #	SHEAVE	WLL	WEIGHT
DNHB-7AL	Aluminum	2,500 lbs.	1.5 lbs.
DNHB-7DI	Ductile Iron	2,500 lbs.	16.5 lbs.
DNHB-7LS	Urethane Lined	2,500 lbs.	12 lbs.
DNHB-7ARM	Helicopter Arm Only	2,500 lbs.	3 lbs.

ALLMAN EQUIPMENT CO., INC. EMPLOYEE OWNED www.tallmanequipment.com

Call Toll Free: 877-860-5666 · International: 630-860-5666









