


A TYPE - HIGH STRENGTH CABLE GRIPS

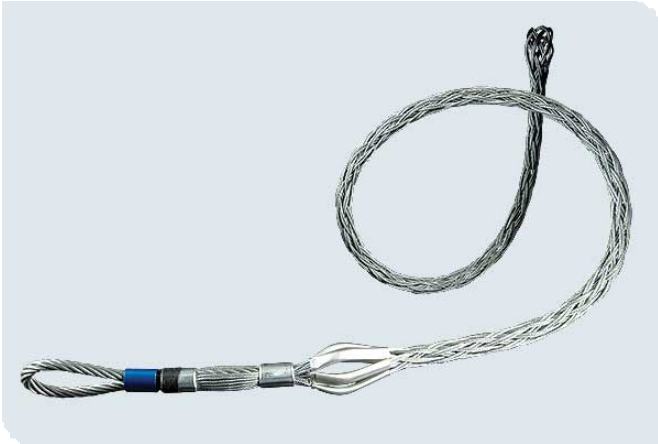

KEY FEATURES

- ✓ Double-weave construction
- ✓ Colour coded for ease of identification
- ✓ Protective shoulders to prevent abrasion
- ✓ Suitable for bare or insulated conductors
- ✓ Flexible eye compatible with Line swivels

The strongest grip we produce; can be used for metal wire and synthetic rope pulls. Perfect for overhead transmission and distribution line pulling or any applications with heavy load ratings, e.g. gas, electric railroad, rigging lines and construction pulls.

When pulling synthetic rope use a Slingco Feed Tube to make rope insertion a breeze. To avoid the effects of torsion a line pulling swivel that rotates under load should be used. Galvanized Steel and color coded for ease of identification.

High strength A-Type grips recommended when pulling guy or static wire.



GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com

A TYPE - HIGH STRENGTH CABLE GRIPS

Slingco Part No.	Color Code	Rope Diameter (ins)	Rope Diameter (mm)	Conductor Diameter (ins)	Conductor Diameter (mm)	Overall Length (ins)	Overall Length (mm)	Lattice Length (ins)	Lattice Length (mm)	Approx. Break Load (lbs)	Approx. Break Load (kg)
ZCS1799	Black	0.25 - 0.65	6 - 16	0.19 - 0.40	5 - 10	38	965	28	710	7,000	3,180
ZCS3020	Purple	0.30 - 0.40	7.5 - 10	0.25 - 0.40	6 - 10	42	1,067	30	760	10,000	4,530
ZCS1800	Dark Green	0.50 - 0.90	13 - 23	0.38 - 0.63	9.7 - 16	51	1,300	37	940	14,000	6,360
ZCS3522	Grey	0.44 - 0.90	11 - 23	0.44 - 0.63	11 - 16	110	2,800	97	2,470	20,000	9,072
ZCS1801	Red	0.75 - 1.10	19 - 28	0.63 - 0.88	16 - 22	74	1,880	58	1,473	20,000	9,072
ZCS5543	Brown	0.75 - 1.10	19 - 28	0.63 - 0.88	16 - 22	81	2,060	62	1,579	30,700	13,925
ZCS1802	Blue	1.00 - 1.50	25 - 38	0.88 - 1.13	22 - 29	80	2,032	61	1,549	30,700	13,955
ZCS1803	Yellow	1.25 - 1.70	32 - 43	1.13 - 1.38	29 - 35	112	2,845	90	2,299	47,000	21,360
ZCS1804	Aluminum	1.50 - 2.10	38 - 53	1.38 - 1.90	35 - 50	119	3,020	92	2,336	67,000	30,455
ZCS6712	-	-	-	2.00 - 2.60	50.8 - 66	109.25	2,775	100	2,557	70,528	32,000
ZCS7852	-	-	-	2.50 - 3.00	63.5 - 76	109.25	2,775	100	2,557	70,528	32,000

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

1 888 685 9478

sales@slingcoamerica.com