


R TYPE - ROTATING MULTI-WEAVE CABLE GRIPS



KEY FEATURES

- ✓ Steel forged revolving head ideal for connecting to Slingco swivels
- ✓ Triple weave construction
- ✓ Used for heavy duty pulling
- ✓ Suitable for bare or insulated cable, conductor or wire
- ✓ Colour coded for easy identification

Like the MU type, the rotating eye cable grip has a triple weave construction and is color coded for ease of identification. The steel forged revolving head is ideal for connecting to Slingco swivels. Warning: The Slingco rotating eye does not revolve under load and does not replace the use of a line swivel. Recommended for underground pulls. Made of Galvanized Steel.

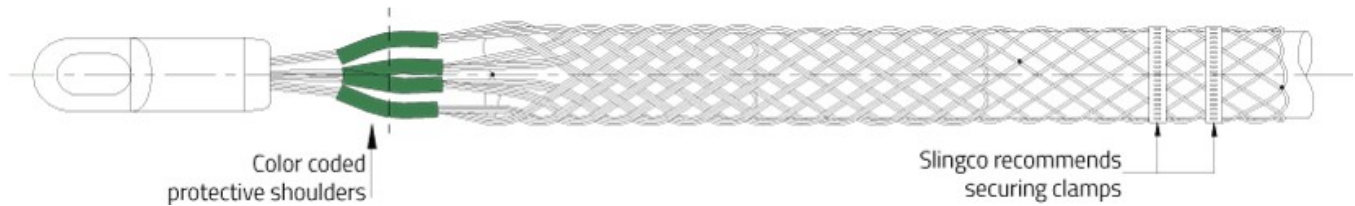

GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com

R TYPE - ROTATING MULTI-WEAVE CABLE GRIPS

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Color Code
ZCS2177	6 - 12	0.25 - 0.50	720	28	3,175	7,000	Dark Green
ZCS2178	12 - 19	0.50 - 0.75	978	39	4,760	10,500	Brown
ZCS2179	19 - 25	0.75 - 1.00	1,199	47	6,395	14,100	Light Blue
ZCS2180	25 - 32	1.00 - 1.25	1,529	60	11,340	25,000	Gold
ZCS2181	32 - 38	1.25 - 1.50	1,289	51	14,061	31,000	Black
ZCS2182	38 - 44	1.50 - 1.75	1,860	73	14,061	31,000	Red
ZCS2183	44 - 57	1.75 - 2.25	1,747	69	19,505	43,000	Dark blue
ZCS2779	51 - 63	2.00 - 2.50	1,370	54	19,505	43,000	Yellow
ZCS2780	63 - 76	2.50 - 3.00	1,311	52	19,505	43,000	Orange
ZCS2781	76 - 89	3.00 - 3.50	1,342	53	19,505	43,000	Aluminum
ZCS2782	89 - 102	3.50 - 4.00	1,351	54	19,505	43,000	Light Green

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-5%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

1 888 685 9478
sales@slingcoamerica.com