


STANDARD STRINGING BLOCK


- Constructed of aluminum alloy, lightweight and durable
- Urethane lined sheave
- Anti-friction bearings packed with synthetic aviation grease
- Extra lifting bars located at the top, center, and at the bottom of the blocks
- Large throat opening allows for the passage of most sleeves and connectors

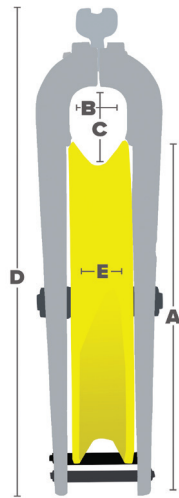

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB12U	12"	2-1/2"	4"	21-7/8"	1-3/8"	12,000 lbs.	20 lbs.
DNSB16U	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	29.5 lbs.
DNSB22U	22"	3-1/8"	5-5/8"	31-9/16"	2"	12,000 lbs.	52 lbs.
DNSB28U	28"	3-1/4"	5-11/16"	38-3/4"	2-3/8"	12,000 lbs.	62 lbs.

GROUNDING STANDARD STRINGING BLOCK

- Constructed of aluminum alloy, lightweight and durable
- Urethane lined sheave
- Anti-friction bearings packed with synthetic aviation grease
- Gold Standard grounding attachment mounted to the frame
- 4-1/2" x 3/4" ground stud accepts virtually any ground clamp
- Dual heavy-duty springs keeps the roller in constant contact with the conductor

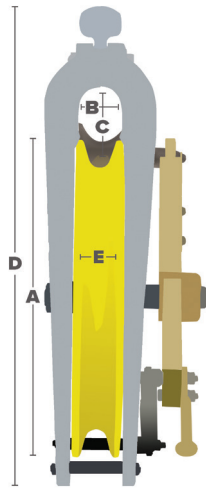

PART #	A	B	C	D	E	WLL	WEIGHT
DNSB12UG	12"	2-1/2"	4"	21-7/8"	1-3/8"	12,000 lbs.	30 lbs.
DNSB16UG	16"	2-1/2"	5-1/4"	26-1/2"	1-3/8"	12,000 lbs.	40.5 lbs.
DNSB22UG	22"	3-1/8"	5-5/8"	31-9/16"	2"	12,000 lbs.	75 lbs.
DNSB28UG	28"	3-1/4"	5-11/16"	38-3/4"	2-3/8"	12,000 lbs.	86 lbs.