


2K STRAP HOIST

CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



VIEW PRODUCT MANUAL

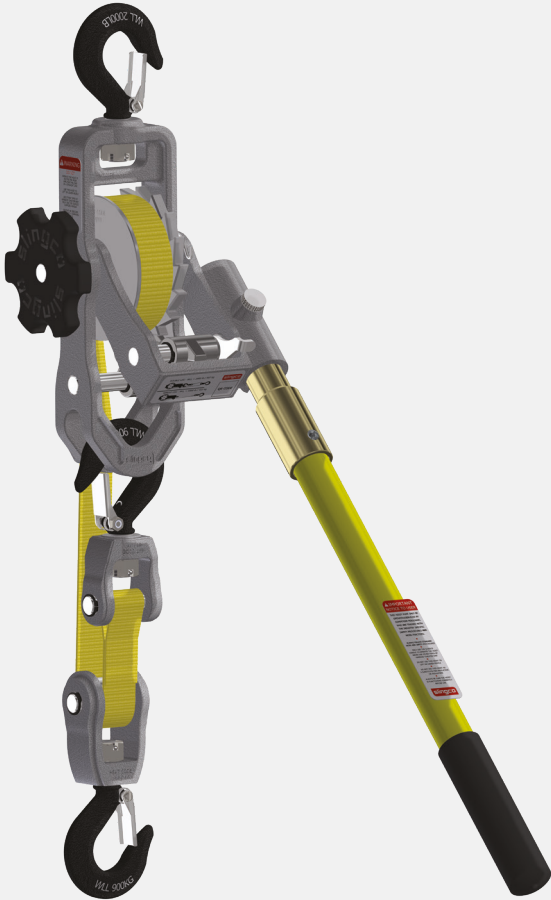

ZLH14321 2K HOIST



ZLH14447
2K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz yellow strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 2k Strap Hoist to splice, dead end, and sag lines. The Slingco 2k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 2k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright yellow in color for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE						Tool weight	
		Capacity		Lift		Headroom		Capacity		Lift		Headroom			
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)
ZLH14321	Standard	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	8.46	3.84
ZLH14447	Hot stick operated	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	9.04	4.10



WARNING

Cancer and Reproductive Harm
www.P65Warnings.ca.gov



3K STRAP HOIST

CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



VIEW PRODUCT MANUAL



ZLH10504 3K HOIST



ZLH10524
3K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz green strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 3k Strap Hoist to splice, dead end, and sag lines. The Slingco 3k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 3k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright green in color for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)
ZLH10504	Standard	1,500	680	10	3	21	533	3,000	1,360	5	1.5	25	635	11.25	5.1
ZLH10524	Hot stick operated	1,500	680	10	3	18	457	3,000	1,360	5	1.5	25	635	11.5	5.22



WARNING

Cancer and Reproductive Harm
www.P65Warnings.ca.gov

FOR ANY INQUIRIES CALL TODAY ON
888 685 9478

Slingco America, Inc.
3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA
TOLL FREE: 888 685 9478 · sales@slingcoamerica.com



slingcoamerica.com

Slingco makes no warranty, express or implied, with respect to this product nor with respect to its specifications. In no event shall Slingco be liable for any direct, indirect, punitive, incidental, special consequential damages to property or life, whatsoever, arising out of or connected with the use or misuse of this product. This product is intended for use by qualified professionals having adequate knowledge of its proper use. August 2025 - v1.1