



VIEW PRODUCT MANUAL

# 2K STRAP HOIST

## CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



ZLH14321 2K HOIST



ZLH14447  
2K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz yellow strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 2k Strap Hoist to splice, dead end, and sag lines. The Slingco 2k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 2k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright yellow in color for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)
ZLH14321	Standard	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	8.46	3.84
ZLH14447	Hot stick operated	1,000	453	9.5	2.9	15.5	394	2,000	907	4.6	1.4	18.5	470	9.04	4.10



# 3K STRAP HOIST


## CONTROLLED MOTION HOIST FOR SPLICING, DEAD ENDING, & SAGGING LINES



VIEW PRODUCT MANUAL



ZLH10504 3K HOIST

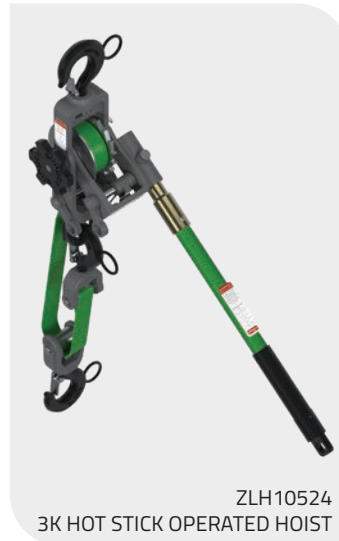

ZLH10524  
3K HOT STICK OPERATED HOIST

- ASME B-30-21 compliant
- 125% working load tested
- Hi-viz green strap
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco 3k Strap Hoist to splice, dead end, and sag lines. The Slingco 3k Strap Hoist features an interlocking pawl lever system with dual pawl springs for controlled tightening and releasing of the strap and to ensure the hoist is engaged while in use. The strap hoist complies with ASME B-30-21 standard and all units are tested to 125% of load.

The Slingco 3k Strap Hoist uses pressure die castings for a professional look, consistent material properties, and a smooth finish. The strap is hi-viz bright green in color for easy visibility.

The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. The strap hoist has a QR code on the product, so the manual is always accessible.

Slingco Part No.	Type	SINGLE LINE						DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight	
		(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)	(ft)	(m)	(in)	(mm)	(lb)	(kg)
ZLH10504	Standard	1,500	680	10	3	21	533	3,000	1,360	5	1.5	25	635	11.25	5.1
ZLH10524	Hot stick operated	1,500	680	10	3	18	457	3,000	1,360	5	1.5	25	635	11.5	5.22

FOR ANY INQUIRIES CALL TODAY ON  
**888 685 9478**

Slingco America, Inc.  
3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA  
TOLL FREE: 888 685 9478 · sales@slingcoamerica.com



slingcoamerica.com