



EQUIPMENT CATALOG

VERSION 11.13.25

HARNESSES - 100 SERIES

ECONOMY TRUEFIT™ X-STYLE HARNESS

- An X-style TrueFit™ harness equipped entirely with steel hardware. The unique value of Buckingham's TrueFit™ Harnesses is that they truly are a universal harness

TRUEFIT™ FEATURES:

- Arc Rated
- One size will fit anyone from a small up to a 3XL
- Whether your 5' 1" and 130 lbs or 6' 6" and 325 lbs, this harness will fit you
- Unique adjustment features both on the front and back of the harness make this a perfect choice if you are looking for a universal harness

PART #	SIZE
GRE100-1	One Size Fits All



3M™ DBI-SALA® EXOFIT™ NEX COMFORT ARC FLASH ROPE ACCESS TOWER HARNESS

- D-ring Placement: Side, Suspension, Back, Front
- Revolving Torso Adapters adjust harness fit with ease and speed and lock webbing into place
- Arc Rated Tower Harness
- Automatic stand-up back D-ring enables efficient dorsal connections
- Dual-locking quick connect buckles lock to harness webbing and prevent adjustments from slipping

PART #	SIZE
GRE100-2	S
GRE100-3	M
GRE100-4	L



3M™ DBI-SALA® FULL BODY HARNESS SIZING GUIDE

SIZE:		HEIGHT:	WEIGHT:
X-SM	Extra Small	4' 10" - 5' 8"	up to 130 lbs
SM	Small	5' 8" - 6' 0"	up to 175 lbs
M	Medium	6' 0" - 6' 2"	up to 240 lbs
L	Large	6' 2" - 6' 4"	up to 300 lbs
X	X-Large	6' 4" - 6' 6"	up to 340 lbs
2XL	XX-Large	6' 6" - 6' 8"	up to 390 lbs
3XL	XXX-Large	6' 8" +	up to 400 lbs

HARNESSES - 100 SERIES

3M™ DBI-SALA® EXOFIT™ NEX COMFORT ARC FLASH CLIMBING/POSITIONING SAFETY HARNESS

- D-ring Placement Back, Side, Front
- Revolving Torso Adapters adjust harness fit with ease and speed and lock webbing into place
- Arc Rated
- Automatic stand-up back D-ring enables efficient dorsal connections
- Dual-locking quick connect buckles lock to harness webbing and prevent adjustments from slipping

PART #	SIZE
GRE100-5	S
GRE100-6	M
GRE100-7	L
GRE100-8	XL

**Refer to 3M DBI-SALA sizing chart on previous page.*



“X” STYLE HARNESS WITH NYLON LOOP BACK ATTACHMENT

- “X” Style Harness with nylon loop back attachment
- Arc Rated
- Meets ASTM F887 Arc Flash Requirements
- Durable nylon webbing with pass through friction buckles
- 3” nylon loop with “A” attachment in the back of the lanyard

PART #	SIZE
GRE100-9	M
GRE100-10	L



“X” STYLE HARNESS SIZE CHART

SIZE		HEIGHT:	CHEST:
S	Small	5' 4" - 5' 7"	36"
M	Medium	5' 8" - 5' 11"	40"
L	Large	6' 0" - 6' 3"	44"
X	X-Large	6' 3" - 6' 6"	48"
2XL	XX-Large	6' 6" +	52"
3XL	XXX-Large	6' 6" +	56"

HARNESSES - 100 SERIES

YATES ARC FLASH RATED ROPE ACCESS TOWER HARNESS

- Meets ANSI/OSHA Class III full-body harness standards
- Certified by UL to the new ANSI Z359.11-2021 and ASTM F887-13
- ASTM F887-2020 Arc-flash testing conducted by ArcWear
- Comes with contoured FR rated shoulder pads

PART #	SIZE
GRE100-11	M
GRE100-12	L
GRE100-13	XL



YATES ARC FLASH LINEMAN HARNESS SIZE CHART

HARNESS SIZE	WAIST SIZE:	HEIGHT:	D-RING TO D-RING:
S	28" - 32"	5' 0" - 5' 9"	25.5"
M	31" - 36"	5' 9" - 6' 4"	28.5"
L	35" - 40"	5' 5" - 6' 4"	32.5"
XL	39" - 46"	5' 5" - 7' 0"	36"

BUCKSTEP™ RELIEF FR POUCH

- One per harness
- Alleviates effects of orthostatic intolerance (suspension trauma)
- Allows the victim to immediately deploy a body support system that allows for improved blood circulation and ability to move and flex muscles until rescued
- Compact and easy to mount
- Attaches to any brand full body harness and is fully adjustable
- For any sized user
- An arc tested system that meets ASTM F887 Product Specifications



PART #

GRE100-14

SELF RETRACTING LIFELINES - 200 SERIES

8' X® EDGECORE™ ARC FLASH TIE-BACK CLASS 2 LEADING EDGE PERSONAL SRL-P *TWIN-LEG WITH STEEL 5K SNAP HOOKS WITH SPEEDLINK™*

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Features steel snap hook leg-end connectors with 5,000 lb rated gate for tie-back applications
- Features SpeedLink™ field replaceability of damaged retractable units, lowering overall cost of ownership and reducing equipment down time. Request SpeedLink™ Spanner Tool
- Complies with ANSI Z359.14-2021 Class 2 SRL-P
- Meets ASTM F887 Standards



PART #

GRE200-1

8' X® EDGECORE™ ARC FLASH TIE-BACK CLASS 2 LEADING EDGE PERSONAL SRL-P *SINGLE-LEG WITH STEEL 5K SNAP HOOK*

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Features steel snap hook leg-end connectors with 5,000 lb rated gate for tie-back applications
- Complies with ANSI Z359.14-2021 Class 2 SRL-P
- Meets ASTM F887 Standards



PART #

GRE200-2

SELF RETRACTING LIFELINES - 200 SERIES

8' X® EDGECORE™ ARC FLASH CLASS 2 LEADING EDGE PERSONAL SRL-P TWIN-LEG WITH STEEL SWIVEL SNAP HOOKS WITH SPEEDLINK™

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Features SpeedLink™ field replaceability of damaged retractable units, lowering overall cost of ownership and reducing equipment down time. Request SpeedLink™ Spanner Tool
- Replacement retractable part number is 84008RP0S
- Complies with ANSI Z359.14-2021 Class 2 SRL-P
- Meets ASTM F887 Standards



PART #

GRE200-3

8' X® EDGECORE™ ARC FLASH CLASS 2 LEADING EDGE PERSONAL SRL-P TWIN-LEG WITH STEEL MINI SWIVEL REBAR HOOKS WITH SPEEDLINK™

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL.
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Complies with ANSI Z359.14-2021 Class 2 SRL-P. Learn more and download White Paper
- Meets ASTM F887 Standards



PART #

GRE200-4

SELF RETRACTING LIFELINES - 200 SERIES

8' FT-X® EDGECORE™ ARC FLASH CLASS 2 LEADING EDGE PERSONAL SRL-P, *SINGLE-LEG WITH STEEL MINI REBAR HOOKS*

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Complies with ANSI Z359.14-2021 Class 2 SRL-P. Learn more and download White Paper
- Meets ASTM F887 Standards



PART #

GRE200-5

8' X® EDGECORE™ ARC FLASH CLASS 2 LEADING EDGE PERSONAL SRL-P *SINGLE-LEG WITH STEEL SNAP HOOK*

- Arc Flash rating AND Class 2 Leading Edge rating for the first time in an SRL.
- Features 100% Kevlar® version of FallTech's innovative EdgeCore™ synthetic lifeline
- Compact design elevates the SRDs to align optimally with worker motion, increasing both comfort and productivity
- Features comprehensive fall clearance charts and tables inside the Kevlar®/Nomex® energy absorber cover
- Internal mechanism design minimizes unintentional lockups to keep you moving freely and productively
- Suitable for below D-ring tie-off up to five feet and leading edge exposures and hazards, including steel and precast concrete
- Rated for workers weighing up to 420 lbs, including clothes, tools, gear, etc.
- Complies with ANSI Z359.14-2021 Class 2 SRL-P. Learn more and download White Paper
- Meets ASTM F887 Standards



PART #

GRE200-6

SELF RETRACTING LIFELINES - 200 SERIES

FT-R® ARC-FLASH CLASS 1 SRL *WITH 30' TECHNORA ROPE*

- 1/4" Technora® synthetic rope line constituent includes alloy steel swivel snaphook
- Innovative energy absorber design provides more consistent performance in all environmental conditions and features Kevlar®/Nomex® cover for arc flash protection
- Improved internal mechanism design minimizes unintentional lockups to keep workers moving freely and productively
- Swiveling anchor and leg-end connectors plus an integrated carrying handle simplify installation and transportation
- Industry first UV-resistant and scratch resistant label keep warnings legible and units in service
- Includes steel anchorage carabiner with 3/4" gate opening
- Complies with ANSI Z359.14-2021 Class 1 SRL
- Tested to ASTM F887



PART #

GRE200-7

LANYARDS & POSITIONING STRAPS - 300 SERIES

BUCK YARD™ (2 SNAPS)

- 4.5' in length
- For full body harness with steel ring dorsal attachment, maximum deployment distance of 48"
- Interior materials stretch to reduce the arresting force to less than 900 lbs
- Two 1706 locking snap hook's on both ends
- Great for harnesses with steel dorsal D-Rings



PART #

GRE300-1

BUCK YARD™ (2 SNAPS)

- 6' in length
- For full body harness with steel ring dorsal attachment, maximum deployment distance of 48"
- Interior materials stretch to reduce the arresting force to less than 900 lbs
- Two 1706 locking snap hook's on both ends
- Great for harnesses with steel dorsal D-Rings



PART #

GRE300-2

LANYARDS & POSITIONING STRAPS - 300 SERIES

BUCK COMBOYARD™

- The ComboYard™ is a tower lanyard that combines the best of multiple common lanyards into one
Accommodates any size angle iron

FEATURES:

- Lanyard features a 5' dual tie-back lanyard with wear guard and rappelling/rescue loops and 12' fall ANSI rated shock absorber
- Tie Back Snaps have a 5000 lb rated gate that can be used in multiple applications
- Two ANSI rated Big BuckSnaps™ are also included to make this lanyard even more versatile
- Big BuckSnaps™ are designed to fit up to 4" angle iron and feature radiused inside edges to slide onto conductor without damaging it



PART #

GRE300-3

SUSPENSION SLING

- 3' Suspension sling that is ideal for creating a temporary anchor point by half-hitching around a suitable structure.
- Pliable webbing has a red warning center to indicate excessive wear or cuts
- 5000 lb Rated



PART #

GRE300-4

LIGHTWEIGHT SUSPENSION SLING

- 2 ft lightweight suspension sling designed to be used as a personal anchor for human support and it can be choked or basket hitched
- This is an updated version of the 39021-2
- The streamlined size of this lightweight suspension sling is very flexible, so it's easy to handle and install
- Steel rings allow any type of connector to be hooked to it
- Comes with a wear protector for wrapping around sharp objects and increases the life of the sling
- 5000 lb Rated



PART #

GRE300-5

LANYARDS & POSITIONING STRAPS - 300 SERIES

SUPERSQUEEZE™ *WITH ROPE INNER STRAP FOR TRANSMISSION*

- The lightweight design of the SuperSqueeze™ offers superb Wood Pole Fall Restriction and offers easy one handed outer strap adjustment by incorporating Buckingham's WebGrab™ which allows adjustment with just a flick of the wrist. With numerous configurations the SuperSqueeze™ fits many climbing styles and needs
- Features the same easy one-handed adjustment on the inner strap with the BuckGrab™
- Can easily be configured to use a rope or web strap based on user's preference
- Only one disconnect point when climbing over an obstruction
- Can be used by right or left-handed users
- All straps have red warning centers
- 3600 lb gate rated hardware



PART #

GRE300-6

BUCKADJUSTER™ *WITH TOUGH ROPE™*

- 8' in length
- Used for tower climbing
- 11.65 mm TrebleKern Tough Rope™ with a red wear indicator to alert the user of excessive wear
- This versatile lanyard can be used for positioning, suspension or rescue
- Twisted eye length adjusting device (LAD) to properly orient it on the user's body belt
- A stitched eye on the tail of the rope allows the user to easily stow the excess tail on either the BuckTender (PN 2404) or Handline Carrier (PN 2402G)
- A multi-colored snap hook allows user to easily distinguish it from the snaps on the SuperSqueeze™ or BuckSqueeze™
- The ANSI Z359.12 3600 lbf rated gate aluminum hardware reduces the overall weight
- Maximum user weight of 350 lbs when fully equipped



PART #

GRE300-7

LANYARDS & POSITIONING STRAPS - 300 SERIES

BUCKADJUSTER™ WITH BLACK TOUGH ROPE

- 8' in length
- Used for tower climbing
- 11.65 MM. TrebleKern Tough Rope™ with a red wear indicator to alert the user of excessive wear
- This versatile lanyard can be used for positioning, suspension or rescue
- Twisted eye length adjusting device (LAD) to properly orient it on the user's body belt
- A stitched eye on the tail of the rope allows the user to easily stow the excess tail on either the BuckTender (PN 2404) or Handline Carrier (PN 2402G)
- A multi-colored snap hook allows user to easily distinguish it from the snaps on the SuperSqueeze™ or BuckSqueeze™
- The ANSI Z359.12 3600 lbf. rated gate aluminum hardware reduces the overall weight
- Maximum user weight of 350 lbs. when fully equipped
- Meets applicable ANSI, OSHA and ASTM standards



PART #

GRE300-8

BUCKADJUSTER™

- 8' in length
- Used for Pole Climbing
- The BuckAdjuster™ is a fully adjustable positioning lanyard (APL) that features the patent pending BuckGrab™ and a 90 degree twist in the eye of the cam for use with a line workers body belt
- The BuckAdjuster™ has a one of kind full red core wear indicator
- Other features include user friendly patented Buckingham double locking rope snap, clear protective tube to help provide maximum rope life and a stitched eye that allows user to minimize length for easy storage



PART #

GRE300-9

LANYARDS & POSITIONING STRAPS - 300 SERIES

PMI SMC ADVANCE TECH HAUL SYSTEM

- Pre-rigged system provides either a 4:1 or 5:1 mechanical advantage
- Built-in progress capture system
- Features the SMC Advance Tech HX and Tech Mate pulleys
- Both pulleys made from high quality anodized aluminum
- Kit includes 10 meters of 9 mm PMI Classic Professional EZ-bend rope
- Pulleys can accommodate rope diameters from 7 mm to 12.5 mm
- Berry Compliant
- Made in the USA
- Weight: 3 lbs 2.4 oz



PART #

GRE300-10

MOBILE FALL ARRESTOR LOCK *WITH BUCKSORBER2*

- Rope size range: 10-13 mm
- Designed to facilitate manipulations during rope ascents
- Used in conjunction with a BuckSorber™2 to work at a distance from the rope
- The connection arm makes the system loss-resistant when passing intermediate anchors
- Carabiner is not included



PART #

GRE300-11

3M™ DBI-SALA® WEB D-RING EXTENSION ANCHOR, POLYESTER, 1.5 FT

- Extends dorsal harness D-ring (or overhead anchor point)
- High strength D-ring tie-off point
- Constructed with abrasion resistant materials
- Built-in wear indicator
- 310 lb weight capacity



PART #

GRE300-12

TOWER KITS & ACCESSORIES - 400 SERIES

TOWER VERTICAL LIFELINE KIT

- Contains all the components necessary to safely allow climbers vertical access to a structure while keeping them 100% fall protected
- The small diameter rope allows for more compact storage and weight reduction

KIT INCLUDES:

- 200' of 7/16" or 11.13 mm abrasion resistant static rope with stitched eyes and metal thimbles on each end (other lengths available) (Model 39S2Q1-300)
- 2 – Mobile Fall Arrest devices (5004L4) that are easy to install. moves smoothly along the rope, and will arrest the user in the event of a fall
- 6 – Redirect slings with carabiners to allow the user to position the lifeline so it conforms to the shape of the structure (Model 3905E-24)
- Lifeline anchor strap (Model 3902-6) with ANSI rated carabiner (Model 5005)
- Storage Bag marked "Vertical Lifeline" for easy identification (Model 4569PQ5-150)
- 2 – Aluminum Triple Action Carabiner – 5555S4
- 6 – Steel Twist Lock Carabiner – 5005T



PART #

GRE400-1

BUCKHOOK CLIMBING KIT

- This system uses a shepherd's hook attached to a fiberglass pole to fit over angle irons. Users will attach a lifeline with a rope grab to the head of the BuckHook™ and then attach a rope grab to oneself to give the user fall protection
- Includes all the components necessary for a "First man up" to have all the safety and fall protection needed to make a safe ascent

Includes:

- BuckHook™ (50371U) Offers fall protection during ascent and descent
- LifeLine (39S2Q2) A 16' Lifeline- 7/16" – Semi Static Kernmantle Rope. Stitched eye with steel thimble at one end. Tight eye with a weighted bag on the other end
- Mobile Fall Arrestor (5004L4) Fits 1/2" & 7/16" Kernmantle rope. Made of Light aluminum alloy. Rolling Cam for better braking. The device moves freely during ascent and descent but locks up in the event of a fall
- Comes with Steel ANSI rated triple action carabiner
- Kit Carry Bag (45400R2-18)



PART #

GRE400-2

TOWER KITS & ACCESSORIES - 400 SERIES

BUCKHOOK BIG SNAP

- The Big BuckSnap™ has been redesigned for easier use and now features a larger opening that allows the user to easily connect over a 4" angle iron
- 3600 lb gate strength
- Hook meets ANSI Z359.12-2019 standards



PART #

GRE400-3

LOCKING LADDER SNAP

- 3600 lb gate strength
- Forged steel heat treated
- 100% proof loaded to 3600lbs / 16 kN Min
- Meets ANSI Z359.12-09 standards



PART #

GRE400-4

SOLO 2 ROPE GRAB

- Rope size range: 10-13 mm
- A hyper-light compact ascender with an ergonomic design that makes it very easy to use
- Perfect for ascension, verified for traversing, and can also be used in block-and-tackle systems
- The lower hole is shaped for optimal positioning of the carabiner while the upper hole fits a safety carabiner to secure the rope



PART #

GRE400-5

CARABINERS & OTHER ACCESSORIES - 500 SERIES

TRIPLE ACTION ALUMINUM CARABINER

- Triple Action Aluminum Carabiner with 3600 lb gate
Gate Strength: 3600 lbs (16KN)
- Breaking Strength: 6744lbs (30KN)
- Standards Met: ANSI Z359.12



PART #

GRE500-1

AMERICANO ALUMINUM TRIPLE LOCKING CARABINER

- An oval shaped, triple-action, aluminum carabiner that features a lightweight I-beam construction
- 3600 lb gate strength
- 5555S10 meets and exceeds all ANSI Z359.12-19 requirements



PART #

GRE500-2

STEEL TWIST LOCK CARABINER *WITH CAPTIVE PIN HOLES*

- Weight: 8.8 oz
- Length: 4.37" (111mm)
- Width: 2.67" (68mm)
- Material: Alloy Steel
- Diameter of Eye: No Eye
- Gate Opening Capacity: .94" (24mm)
- Gate Strength: 3,600 lbs
- Breaking Strength: 9,216 lbs (41KN)
- Standards Met: CSA Z259.12 / ANSI Z359.12




PART #

GRE500-3

CARABINERS & OTHER ACCESSORIES - 500 SERIES

STEEL AUTO LOCK CARABINER

- Weight: 15.6 oz (442 g)
- Length: 7.6" (193.5 mm)
- Width: 4" (103 mm)
- Material: Steel
- Diameter of Eye: No Eye
- Gate Opening Capacity: 2.04" (52 mm)
- Gate Strength: 3,600 lbs (16KN)/td>
- Breaking Strength: 8,992 lbs (40KN)
- Standards Met: ANSI/ASSE Z359.12-2009

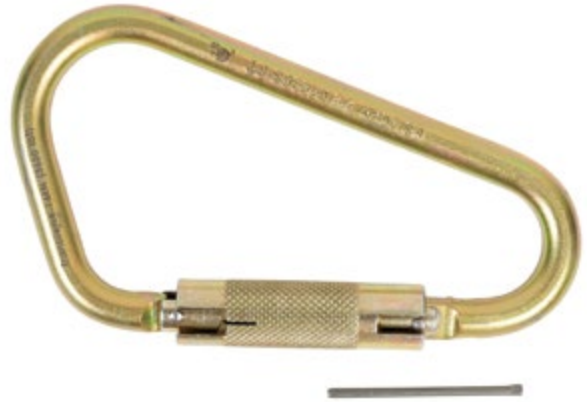

PART #

GRE500-4

ACCESSORY TOOL HOLDER

- Design allows one-handed selection and return of tools
- Slips in through the harness straps and stays in place, thanks to its stabilizing clip
- Hole on top for attaching a tether to tools
- Upper part designed for grouping and organizing equipment
- Gate has integrated plastic cover to limit the risk of accidental snagging



PART #

GRE500-5

GATED HANDLINE CARRIER

- Buckingham's new Gated Handline Carrier takes our previous handline carrier (2402) and improved upon it in a number of ways
- The carrier is made of Polymer and includes a hole to easily secure it to the body belt with a bolt or zip tie (zip tie included)
- The carrier will straighten when approximately 25 pounds of pressure is applied and up to 35 pounds when the handline gate is closed, allowing the handline to pull free
- Ideal when using the Ox Block® and related accessories



PART #

GRE500-6

CARABINERS & OTHER ACCESSORIES - 500 SERIES

NUT AND BOLT BAG

- Features an inside pocket for organizing spare parts, web loops strategically positioned to store cotter pins during work, a powerful magnet, and a reinforced bottom to prevent premature wear makes this bag a must for any line worker



PART #

GRE500-7

DDIN MESH BAG 12" X 30"

- Constructed with durable and high-quality mesh materials, this bag offers excellent visibility and breathability while ensuring the safety and accessibility of your tools and equipment
- The spacious main compartment of the Mesh Tool Bag provides ample storage space for various lineman tools, including wrenches, pliers, cable cutters, and more
- The mesh design allows for quick and easy identification of tools, saving you valuable time on the job



PART #

GRE500-8

DDIN MESH BAG 10" X 19"

- Constructed with durable and high-quality mesh materials, this bag offers excellent visibility and breathability while ensuring the safety and accessibility of your tools and equipment
- The spacious main compartment of the Mesh Tool Bag provides ample storage space for various lineman tools, including wrenches, pliers, cable cutters, and more
- The mesh design allows for quick and easy identification of tools, saving you valuable time on the job



PART #

GRE500-9

CARABINERS & OTHER ACCESSORIES - 500 SERIES

SPIN L1

- Very high efficiency single pulley with swivel
- Rope diameter: 7-13 mm
- Openable even when attached to the anchor, the SPIN L1 pulley is designed for maximum simplicity in setting up hauling or load deviation systems, and tyroleanes
- The large diameter sheave mounted on sealed ball bearings gives it excellent efficiency
- The swivel facilitates handling, allowing the pulley to be oriented under load, and direct connection of carabiners, ropes or slings
- MWL 1,798 lbs - MBS 8,093 lbs



PART #

GRE500-10

BUCK SIDE SWIVEL

- The Buck Side Swivel™ is a heavy-duty aluminum single sheave pulley that has a 16 mm or 5/8" diameter rope capacity with a 2500 lb working load limit
- The "Side Swivel" plate allows rope to be installed/removed without disconnecting it from the anchor point
- MBS 10,000 lbs



PART #

GRE500-11

PETZL MAESTRO® S

- Descender with integrated progress-capture pulley for loads up to 250 kg, compatible with 10.5 to 11.5 mm ropes
- Working load limit: - 150 kg when used with a 10 to 11.5 mm rope - 250 kg when used with a 10.5 to 11.5 mm rope



PART #

GRE500-12

PETZL I'D® S

- Self-braking descender with anti-panic function for work at height and rope access work
- Lowering load: Up to 150 kg for one person, and up to 272 kg when used for rescue
- Rope compatibility: 10 to 11.5 mm diameter



PART #

GRE500-13

GREAT RIVER ENERGY ORDER FORM VER 5.30.25

HARNESSES & ACCESSORIES - 100 SERIES

Part #	Description	Qty
GRE100-1	Economy TrueFit™ X-Style Harness (U603P8Q1)	
GRE100-2	3M™ DBI-SALA® ExoFit™ NEX Comfort Arc Flash Rope Access Tower Safety Harness (1113761) (Small)	
GRE100-3	3M™ DBI-SALA® ExoFit™ NEX Comfort Arc Flash Rope Access Tower Safety Harness (1113762) (Medium)	
GRE100-4	3M™ DBI-SALA® ExoFit™ NEX Comfort Arc Flash Rope Access Tower Safety Harness (1113763) (Large)	
GRE100-5	3M™ DBI-SALA® ExoFit NEX™ Comfort Arc Flash Climbing/Positioning Safety Harness (1113330) (Small)	
GRE100-6	3M™ DBI-SALA® ExoFit NEX™ Comfort Arc Flash Climbing/Positioning Safety Harness (1113331) (Medium)	
GRE100-7	3M™ DBI-SALA® ExoFit NEX™ Comfort Arc Flash Climbing/Positioning Safety Harness (1113332) (Large)	
GRE100-8	3M™ DBI-SALA® ExoFit NEX™ Comfort Arc Flash Climbing/Positioning Safety Harness (1113333) (Extra Large)	
GRE100-9	"X" Style Harness with Nylon Loop Back Attachment (683XA) (Medium)	
GRE100-10	"X" Style Harness with nylon loop back attachment (683XA) (Large)	
GRE100-11	Yates Arc Flash Rated Rope Access Tower Harness - 390FRA (Medium)	
GRE100-12	Yates Arc Flash Rated Rope Access Tower Harness - 390FRA (Large)	
GRE100-13	Yates Arc Flash Rated Rope Access Tower Harness - 390FRA (Extra Large)	
GRE100-14	BUCKSTEP™ Relief FR Pouch – 105RSK1	

SELF RETRACTING LIFELINES - 200 SERIES

GRE200-1	8' FT-X® EdgeCore™ Arc Flash Tie-Back Class 2 Leading Edge Personal SRL-P, Twin-leg with Steel 5k Snap Hooks with SpeedLink™ (84008TP8S)	
GRE200-2	8' FT-X® EdgeCore™ Arc Flash Tie-Back Class 2 Leading Edge Personal SRL-P, Single-leg with Steel 5k Snap Hook (84008SP8S)	
GRE200-3	8' FT-X® EdgeCore™ Arc Flash Class 2 Leading Edge Personal SRL-P, Twin-leg with Steel Swivel Snap Hooks with SpeedLink™ (84008TP2)	
GRE200-4	8' FT-X® EdgeCore™ Arc Flash Class 2 Leading Edge Personal SRL-P, Twin-leg with Steel Mini Swivel Rebar Hooks with SpeedLink™ (84008TP0S)	
GRE200-5	8' FT-X® EdgeCore™ Arc Flash Class 2 Leading Edge Personal SRL-P, Single-leg with Steel Mini Rebar Hook (84008SP0)	
GRE200-6	8' FT-X® EdgeCore™ Arc Flash Class 2 Leading Edge Personal SRL-P, Single-leg with Steel Snap Hook (84008SP1)	
GRE200-7	FT-R® Arc-Flash Class 1 SRL with 30' Technora Rope (721530T)	

LANYARDS & POSITIONING STRAPS - 300 SERIES

GRE300-1	BUCK YARD™ (2 Snaps) (8VV1D14.5S1)	
GRE300-2	BUCK YARD™ (2 Snaps) (8VV1D16S1)	
GRE300-3	The Buck ComboYard™ (5V67AQ1)	
GRE300-4	Suspension Sling (3902-3)	
GRE300-5	Lightweight Suspension Sling (39021J12-2)	
GRE300-6	SuperSqueeze™ with Rope Inner Strap for Transmission (488RT)	
GRE300-7	BuckAdjuster™ with Tough Rope™ (92C+R-8)	
GRE300-8	BuckAdjuster™ with Black Tough Rope™ (92E+R-8)	
GRE300-9	BuckAdjuster™ – 9-8	
GRE300-10	PMI SMC Advance Tech Haul System - KT36158	
GRE300-11	Mobile Fall Arrestor Lock with BuckSorber2 – 5004L4	
GRE300-12	3M™ DBI-SALA® Web D-ring Extension Anchor	

TOWER KITS & ACCESSORIES - 400 SERIES

GRE400-1	Tower Vertical Lifeline Kit (109-200)	
GRE400-2	BuckHook™ Climbing Kit (KIT9-18)	
GRE400-3	Big BuckSnap™ (30342)	
GRE400-4	Locking Ladder Snap (30351)	
GRE400-5	Solo 2 Rope Grab (2257)	



To order by phone call: Luka at (877) 860-5666 or Adam at (630) 441-3770

GREAT RIVER ENERGY ORDER FORM VER 5.30.25

CARABINERS & OTHER ACCESSORIES - 500 SERIES

Part #	Description	Qty
GRE500-1	Triple Action Aluminum Carabiner (5555S3)	
GRE500-2	Americano Aluminum Triple Locking Carabiner (5555S10)	
GRE500-3	Steel Twist Lock Carabiner with Captive Pin Holes (5005T)	
GRE500-4	Steel Auto Lock Carabiner (5005L1)	
GRE500-5	Accessory Tool Holder (2402C)	
GRE500-6	Gated Handline Carrier (2402G)	
GRE500-7	Nut and Bolt Bag (45911M2)	
GRE500-8	DDIN Mesh Bag, 12" x 30" (DNMB1230)	
GRE500-9	DDIN Mesh Bag, 10" x 19" (DNMB1019)	
GRE500-10	SPIN L1 (P001BA0)	
GRE500-11	Buck Side Swivel™ (50071B1)	
GRE500-12	Petzl Maestro®s	
GRE500-13	Petzl I'd®s	

SHIPPING ADDRESS / NOTES

Name				Phone #	
Address				Notes	
City					
State		Zip Code			



To order by phone call: Luka at (877) 860-5666 or Adam at (630) 441-3770